



PCT/GB 2003 / 0 0 0 2 6 6



INVESTOR IN PEOPLE

3

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

REC'D 20 MAR 2003

WIPO

PCT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 20 MAR

WIPO

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

W. Evans

Dated

27 February 2003

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
OfficeTHE PATENT OFFICE
A18JAN02 E688944-1 D0265
P01/7700 0.00-0201101.3

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

18 JAN 2002

RECEIVED BY FAX

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

537 & B

2. Patent application number

(The Patent Office will fill in this part)

0201101.3

18 JAN 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Renishaw plc

New Mills

Wotton - under Edge

Gloucestershire GL12 8JR

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

7988 2691002 ✓

4. Title of the invention

Laser marking

5. Name of your agent (if you have one)

R.D. Carrill

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Renishaw plc Patent Dept

New Mills

Wotton - under Edge, Glos, GL12 8JR

Patents ADP number (if you know it) 2691003

7988650001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer Yes if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

0
16 ✓
0
0
4 only 20 total

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 8/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

none

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

18-1-2002

12. Name and daytime telephone number of person to contact in the United Kingdom

A.ILES 01453 524524

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

1

Laser marking

This invention relates to the forming of readable (not necessarily optically) precision marks, a pattern or
5 other indicia on metrological and like equipment by means of irradiation of laser light. In particular but not exclusively it relates to the formation of a pattern of marks on an object e.g. graduation marks on a scale to be used for metrological purposes or a grating of
10 discontinuities for causing interference of light reflecting or passing through the grating.

Some major problems encountered when using a beam of laser light for marking a surface or subsurface of a
15 material are: the dimensional control of the laser light with respect to that surface/subsurface e.g. to maintain accurate spacing of the marks; the correct selection of parameters of the light e.g. beam fluence (energy per unit area) duration of exposure of the
20 surface/subsurface and; the adaptation of the marking process to suit different applications such as the ability to mark flat surfaces as well as curved surfaces; and the ability to produce patterns of marking having different pitch lengths.

25 The production of measurement scale using a laser light to mark its surface has been considered previously. In US 4932131 an in-situ scale writing or calibration technique is used. A reference is used to lay-down
30 marks or correct any deficiencies in the scale. A laser is used to read and write a scale but there is no disclosure of the method for doing this.

2

EP 0395374 describes a technique for producing an interference pattern marks on a light sensitive substrate using a low power (10mW) laser. The method of ensuring accuracy of the marks written to the substrate is by comparing the position of the laser with a reference.

This invention provides marking apparatus for repeatedly marking a object comprising: a controller; a laser for providing an output beam of laser light at repeated instants; optical elements for irradiating the object for causing the markings; a displacement device for causing relative displacement between the object and the beam; a displacement sensor for sensing the relative displacement and for issuing a displacement signal to the controller, and; a reader for determining the distance between two or more markings produced when the object is subjected to the beam and for issuing a pitch signal to the controller; the controller in use controlling, in response to displacement and pitch signals, the repeated instants at which the laser emits its beam.

Thus, in an embodiment of the invention apparatus is provided which moves a blank scale past a laser light source which may have beam manipulation (e.g. beam shaping lens and/or a scanner). The movement of the scale is monitored by a controller and the appropriate laser firing signals are given by the controller. The controller monitors the pitch of graduation marks produced by the laser by using scale readers disposed downstream of the point at which the marking takes place and any pitch correction required is made by the controller.

Preferably the invention provides for the repeated
instants at which the laser emits its beam to be
5 advanced or retarded, or the manipulation to be
changed, all in response to known apparatus error
information accessible by the controller.

Thus, in the said embodiment the controller has access
10 to a map of known repeatable errors which occur during
use of the apparatus and those known errors are
compensated by advancing or retarding the time at which
the laser is fired and/or changing the manipulation
(e.g. the scanner path).

15 JP 5169286 shows a method of obtaining a marking
perpendicular to the direction of travel of a
measurement scale which is being marked using a laser.
In JP 5169286 there is no mention of the apparatus
20 which controls the firing of the laser or the beam's
position relative to the scale.

According to a second aspect of the invention there is
provided a number of techniques described herein for
25 irradiating an object so as to form a marking of a
desired configuration. Preferably such markings form
graduation marks on a measurement scale e.g. an
elongate linear scale or a rotary encoder scale.

30 It is known there are effectively two different
mechanisms for pulsed laser ablation of materials and
that the key factor for determining which mechanism is
employed is the pulse length. Essentially, for pulse
lengths above approximately 4 picoseconds, the material

4

is melted and then boiled off from the surface with considerable transfer of thermal energy to the material. For pulse lengths below approx. 4 picoseconds (i.e. ultrashort pulses), the molten stage
5 is omitted with the material either (depending on correct understanding of the mechanism) being sublimated straight from the solid to the gaseous or ejected from the substrate as minute solid particles.

10 Whatever the mechanism when ultrashort pulses are used, the amount of thermal energy transferred to the material is significantly reduced.

The use of lasers for the marking of graduations on
15 metrological devices is known, however according to a third aspect the invention provides apparatus employing an ultrashort pulse laser of sufficient pulse energy for ablative operation in the manufacture of a periodic pattern e.g. precision encoder.

20

The use of an ultrashort pulse laser for producing the graduations on a precision metrological scale is advantageous as it reduces any allowance that has to be made for thermal effects when positioning one
25 graduation relative to others during the graduation marking process.

The invention is further refined by the selection of the correct fluence to ensure the most efficient
30 removal of material and optimum surface finish of the ablated area. As the fluence is increased above the threshold value (F_{th}) for the material, ablation takes place leaving, at low fluence levels, a relatively smooth surface and, as the fluence is increased, so

5

does the roughness of the surface finish.

It has now been determined that, for ultrashort pulsed laser beam the fluence for optimum rate of material
5 removal is approximately e^2 times the threshold fluence F_{th} for that material (e being the mathematical constant for the base of natural logarithms and being equal to about 2.72). This fluence level also gives a surface finish which presents a good optical contrast
10 to an otherwise polished substrate.

So in a preferred feature of the third aspect of the invention the pulse energy is approximately $e^2 F_{th}$.

15 Various features of the invention will now be described with reference to the drawings, wherein:

Figure 1 shows manufacturing apparatus according to the invention for producing measurement scale;
20

Figure 2 shows part of the apparatus shown in figure 1 in more detail and;

Figures 3a to 3e show various techniques for marking
25 the measurement scale shown in the previous figures.

Figure 1 shows a manufacturing apparatus for making markings on a continuous ribbon of material 10 (eg from a reel of the material) fed to the apparatus. In this
30 example the material is polished stainless steel. The apparatus has a frame 5 to which various elements of the apparatus are attached. The ribbon 10 traverses firstly a tensioning system 50, then it is fed to a marking station 100, and then onto another tensioning

6

system 60 which opposes the first tensioning system 50. Both tensioning systems impart constant tension in the ribbon as it moves through the marking station irrespective of the speed of the ribbon.

5

In each tensioning system a counterweight 55,65 provides an upward force to a moveable roller 51,61 via a pivot 52,62.

- 10 A feed motor for driving feed wheel 53,63 increases or decreases in rotational speed in response to the lowering or raising of the weight 55,65. A potentiometer 54,64 controls the speed of the motor and is connected to the pivot 52,62 also, such that the
- 15 lowering and raising of the wheel changes the resistance of the potentiometer. If the speed of the feed roller is too slow the roller 51, 61 will fall and the potentiometer resistance will decrease. In so
- 20 doing the lowering of the resistance will cause the feed motor to increase the speed of the feed wheel 53, 63 and vice versa.

The ribbon's displacement is governed by the marking station 100 which is illustrated in more detail in

25 figure 2.

In figure 2 two pinch rollers 20 and 22 are used to feed the ribbon (which has constant tension through the station 100. Pinch roller 20 is driven at an

30 approximately constant rate but no speed governing need be used other than a controllable voltage supply. Pinch roller 22 has two rotary encoder rings 24 affixed thereto or marked thereon. Two readers 26 read the encoder markings to provide a machine controller (200

7

figure 1) with two signals so an average of the two can be used to provide a ribbon displacement value to the controller. This averaged ribbon displacement signal at the machine controller 200 is used, via software, to govern the firing of ribbon marking laser 21.

Additionally a system of two or more scale readers, in this instance two readers 23a and 23b, are used to read the scale that is being produced by the laser 21. The readers 23 are set at a pre-determined distance L apart and so any errors in the pitch of the markings can be determined and adjustment via software of the laser firing rate can be made if appropriate. So even if the temperature at the laser irradiated area increases slightly, the temperature at the readers will remain constant and then any slight heating by the laser light can be compensated for by increasing the scale pitch at the laser irradiated area.

So, the laser can produce markings when desired and to a corrected pitch.

The scale produced by the apparatus described above will be very accurate. However, its accuracy may be further improved by removing repeated errors which arise through machine imperfections like: slightly inaccurate markings on the rotary encoder rings 24; run-out of these rings; eccentricity of either pinch roller 22 or 20; or persistent inaccuracies in the movements of the scanner 25 used to control the position of the laser on the scale 10.

If several samples of scale are produced each having several cycles of the pinch roller rotation, and the

patterns of the scale on the samples are measured using a highly accurate linear measurement device (eg an interferometric measurement device) then, using mathematical analysis, the repeated deviations in the scale can be found. It is possible then to provide an error map for the scale producing apparatus which can be stored for use by the machine controller 200 to correct the laser firing and/or scanner movements so as to eliminate those repeated errors.

During such an error mapping procedure it is important to ascertain the position of the pinch rollers in relation to the sample scale so that the error correction (advancement or retardation of the fire signal) can occur at the correct moment in time. To this end an index mark 29 is placed on each roller 20/22 and the positions of the rollers at the start of production are recorded, eg by producing a corresponding mark on the scale.

The error map stored in the machine controller 200 can be accessed during scale production thereafter and could be updated at intervals by repeating the procedure outlined above so as to maintain the enhanced accuracy of the apparatus.

The above method describes exemplary techniques and apparatus for positioning measurement scale relative to a laser. The following description details examples the laser parameters used and techniques for marking a scale but these concepts have application to other products.

The laser used for marking is a titanium-sapphire laser

which is ideal for firing ultrashort high energy pulses of light. For pulse lengths below approximately 4 picoseconds (i.e. ultrashort pulses), ablation of material subjected to a pulse takes place provided that the beam energy (F) referred to as "fluence" is above a threshold (Fth). The amount of thermal energy transferred to the material is significantly less than that transferred when using longer pulses.

- 10 It has been found when the fluence is increased above the threshold value (Fth) for the material, ablation takes place leaving, at low fluence levels, a relatively smooth surface and, as the fluence is increased, so does the roughness of the surface finish.
- 15 Also it has been found that the most efficient removal of material and optimum surface finish of the ablated area is obtained when the fluence is approximately e^2 times the threshold fluence Fth for that material. Further, reasonably good results are obtained when the
- 20 range 6 to 9 times the threshold fluence is used. This fluence range also gives a surface finish which presents a good optical contrast to an otherwise polished substrate.
- 25 Thus, in the production of the stainless steel scale illustrated in figures 1&2, a titanium sapphire laser is used to fire ultra-short laser pulses of about 100 femtoseconds at a repetition rate of about 5 kHz. An output beam from the laser is focused to a fluence in
- 30 the region of 12-16 kJ/m². The exact parameters depend on the material to be marked. The depth of ablation on the scale surface will dependant also on the characteristics of the material and the fluence of the

10

beam, but typically will be in the order of a few hundred nanometres ($\text{nm} = \text{m} \times 10^{-9}$). If a continuous substrate like stainless-steel is used as a scale then a few pulses of laser light will be required in order to generate the depth of marking required to enable a scale reader to differentiate between a marked and an unmarked surface. It is possible also that the surface of the scale may be a film, eg a chromium layer on, say, a glass substrate, and the depth of ablation may be that which is sufficient to substantially remove the film. If a phased light interference pattern is required then the depth of pattern required will depend on the wavelength of light used during use of the grating.

15

Where short pulse ablation is used the technique imparts little thermal energy to the scale. This means that no major compensation has to be made to the dimensions of the markings because there is very little thermal expansion. Also heat distortion of the scale does not take place.

An alternative to ablation is the surface treatment of the scale, ie sufficient fluence in the beam to change the surface characteristics of the material, eg a thermally or light sensitive surface on the scale would change its characteristics eg change, colour, its ability to be magnetised or some local change in its ability to resist a chemical eg an etchant, when subjected to the laser light.

.11

Depending on the power of the laser used and (if required) the movement of the laser beam relative to the scale, various marking techniques can be used. For a given pulse energy, the desired fluence is selected by varying the area over which the laser beam is focused. The relationship between that area and the desired line width dictates which of these techniques is applicable. The following paragraphs use scale of 40µm pitch P (i.e. 20µm line width and a 20µm space) and 6mm wide as an example in figs 3.

The output of the beam will require some manipulation. If the laser had sufficient pulse energy to give the correct fluence over the entire 20µm by 6mm line, the simplest way to mark the scale would be to move the scale to a position where it is to be marked, stop movement, fire the laser then move the scale to the next position to be marked. The laser beam output might be flattened and elongated (see below) to produce a thin line (usually an ellipse) and therefore would produce a corresponding line pattern without the need to move the beam across the width of the scale (in the y direction in figs 3).

If the pulse energy was insufficient to give the correct fluence over the entire 6mm line length, Beam 27 might be shaped e.g. to form a round spot or ellipse which is shorter than the width of the scale markings required. In which case the beam can be moved (scanned) across the scale (in the y direction) whilst the scale is stationary.

Whilst the above techniques give adequate results it is preferred to scan the beam in the directions of x and y (in any combination) using an optical scanner 25 and to keep the scale moving constantly. If the scale is kept moving constantly then the scale can be advanced more quickly and faster production of the patterns produced by the laser can be made.

A number of marking techniques are illustrated in figures 3a, b, c, d and e.

Figure 3a shows an elliptical irradiated area (called a spot in this application). In practice the spot has dimensions approximately 20 μ m in width t and 6 mm long w. The ratio of t:w is not shown to scale in any of the figs 3. The spot is not moved in the y direction but is fired many times at the scale 10 as it is advanced with the scale 10 so as to keep pace with it as it moves continuously in the direction of arrow T. The spot is caused to fly back to its start position once it has treated the surface of the scale sufficiently. In this example a 1 Watt laser is used which will need to be fired approximately 30-60 times at the surface of the scale. Thus scale markings 28a of a 40 μ m pitch can be produced at a rate of about 50-80 per second, i.e. 30-60 firings at repetitions of 5 kHz and then fly back to the next start position..

Alternatively, a lower pulse energy could be focused into a spot 6mm long but less than 20 μ m wide. Figure 3b shows a 5 μ m wide, t, elliptical spot 27b of such a configuration. In this arrangement the spot is not scanned in the y direction because it has sufficient

13

width w to cover the width of the scale required. The scale 10 is moved and the spot 27b is again scanned in the X direction so as to keep pace with the movement of the scale. When the requisite treatment has been
5 performed on the area of the surface of the scale irradiated by the spot (the first position) then the spot is moved.

The spot can be moved on to various positions. It can
10 be moved to a position one $40\mu\text{m}$ pitch on from the first position, so that scale markings having non-unity mark/space ratio are created (see below). Alternatively the spot can be moved to a position $5\mu\text{m}$ from the first
15 position (the second position, directly adjacent the first position) and then scanned again to keep pace with the scale movement. When the requisite amount of treatment has been given at the second position a band
20 of treatment twice the width of the spot (i.e. $10\mu\text{m}$ wide will be produced. Repeating the treatment at further adjacent positions can produce a scale having markings which are further multiples of the spot width.

Yet another alternative is moving the spot a fraction
25 of the spot width, or allowing the spot to fall behind the movement of the scale whilst it is treating the scale, giving give markings which can be non integer multiples of the spot width.

The spot can be caused to move in any x and/or y
30 direction and be fired at any time. An advantage of this is that parts of the scale produced can be missed out (as shown) and altered in some way (e.g markings which are less deep than other markings). Such markings

14

can be used as reference marks or absolute dimensions on a scale.

Figure 3c shows another method of marking with the same lower pulse energy. Spot 27c is again focussed at a start position and is scanned in the direction c as scale moves in the direction T. The spot in this instance is elliptical and is approximately 20 μm wide and 1.5 mm long. Whilst being scanned the spot performs the desired treatment at the surface of the scale. In this instance the treatment is a series of overlapping ablations which form a line pattern. The spot is caused to fly back to position S once it has finished its treatment.

The correct fluence can be achieved by splitting the beam into a number of smaller spots instead of one larger one. Another method of marking is shown in figure 3d this alternative method utilises a row of spots 27d which are fixed in relation to the x and y directions. The scale is moved in the direction of arrow T and the positions at which the spots are aimed are not moved. The firing of the laser occurs once the scale has been stopped when the distance travelled by the scale in direction T is equal to nP where P is the pitch of the desired pattern and n is an integer value used to space the spots 27d apart. The firing at each successive interval when the scale has been displaced by distance nP comprises a number of ablations in order to obtain the correct depth of treatment.

In the method illustrated in figure 3e a number of slightly elliptical spots (they may circular) are scanned in the directions e (which has just y or x&y

15

components depending on spot configuration) as the scale advances in the direction of arrow T. A series of laser firings will be required and an overlapping pattern of spots will result in a straight line pattern 28e being produced. The multiple spots used in the methods illustrated in figure 3d and 3e are produced by optically splitting the output beam of the laser.

10 In each of the methods illustrated in figures 3 selective advance of retardation of the firing of the laser can be used, controlled by controller 200, to correct any detected errors in the pitch of the patterns 28 and/or to correct any known machine errors resulting from the error mapping described above. The 15 elliptical spots shown are formed by passing the output beam of the laser either a cylindrical lens or a system of spherical and/or cylindrical lenses.


20 The methods illustrated in figure 3 and the laser parameters described may be applied to the production of other flat ribbon measurement scale. Any component may be treated in the manner described and illustrated above eg short lengths of round or flat bar, the actual components of the machines that require relative 25 displacement to be measurement, like linear motor shafts, ball screw shafts and other forms of leadscrew, beds of machine tools, relatively rotatable parts like rotary encoders and other devices that have relatively moveable parts.

30

16

In such instances the part to be marked could be moved relative to the laser or vice versa, and that relative movement will be monitored by a reference measurement device eg the rotating pinch rollers 20, 22, an accurate linear encoder, or an interferometric measurement device.

Where non-planar surfaces of parts require marking then it is possible for that part to be rotated whilst it is being marked. However, only relatively small diameter parts (less than 25 mm in diameter) would need to be rotated. Larger diameter parts will have sufficient flatness and the focal depth of the laser beam will be sufficient so that such parts could be treated like the flat ribbon mentioned above.

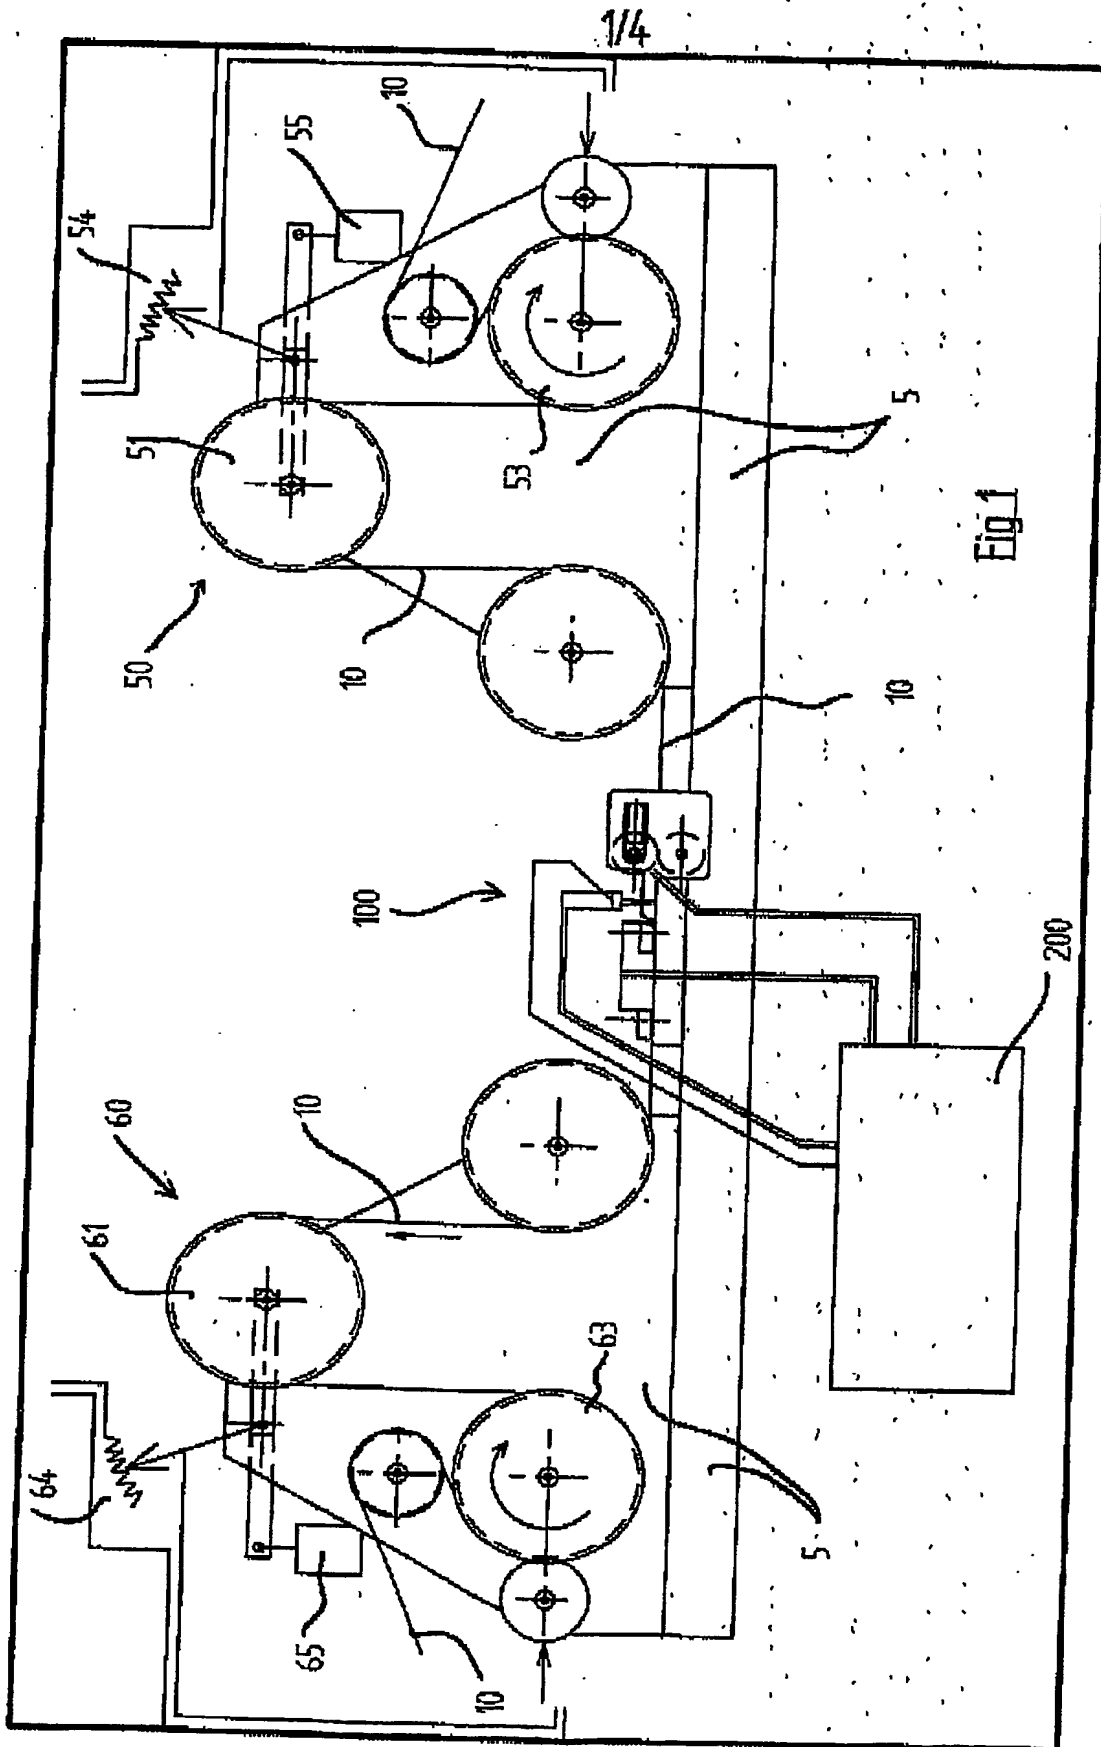

2/4

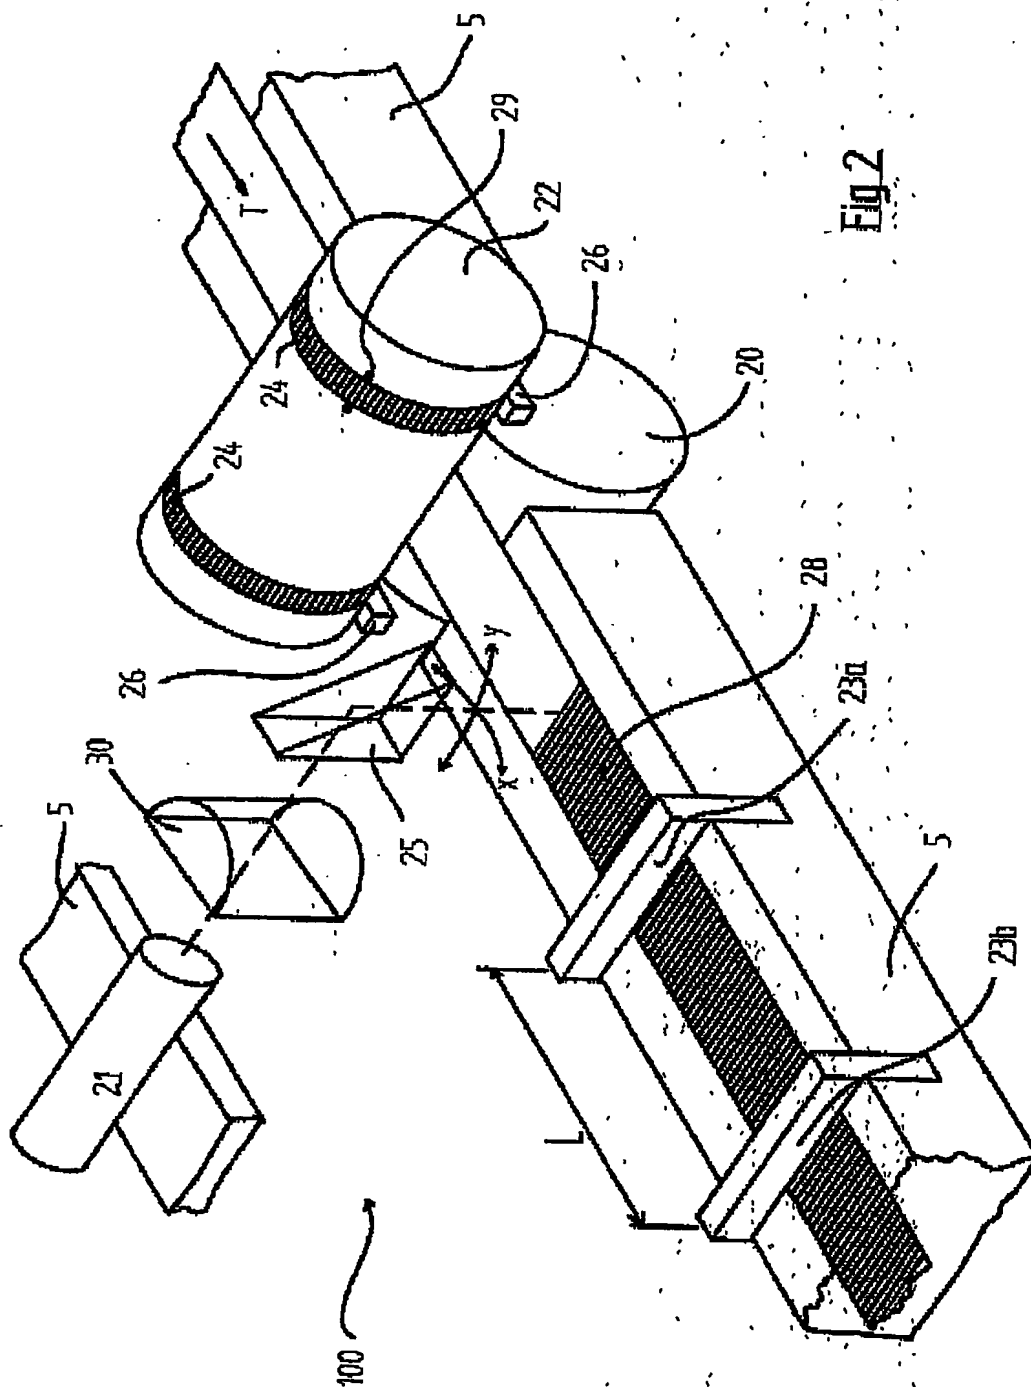


Fig. 2

3/4

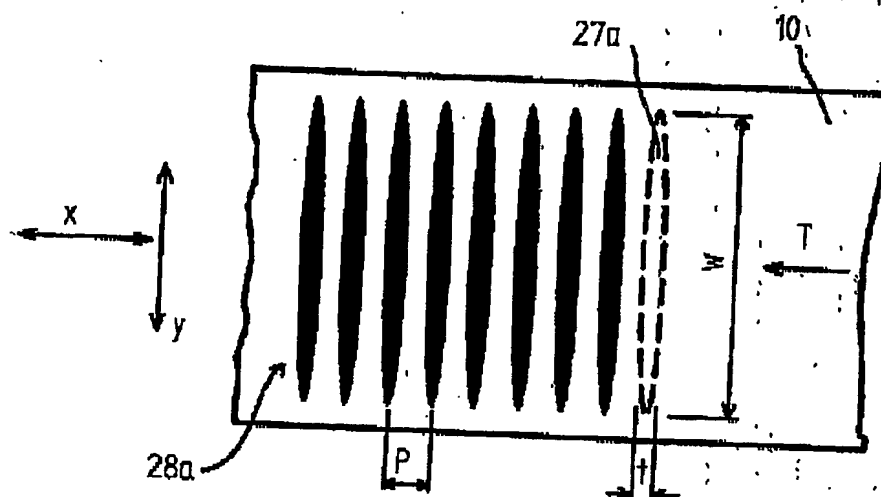


Fig 3a

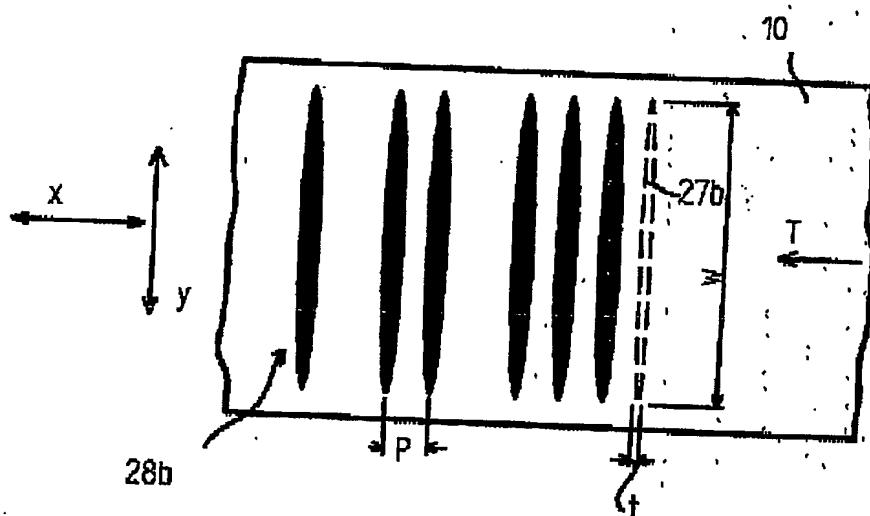


Fig 3b

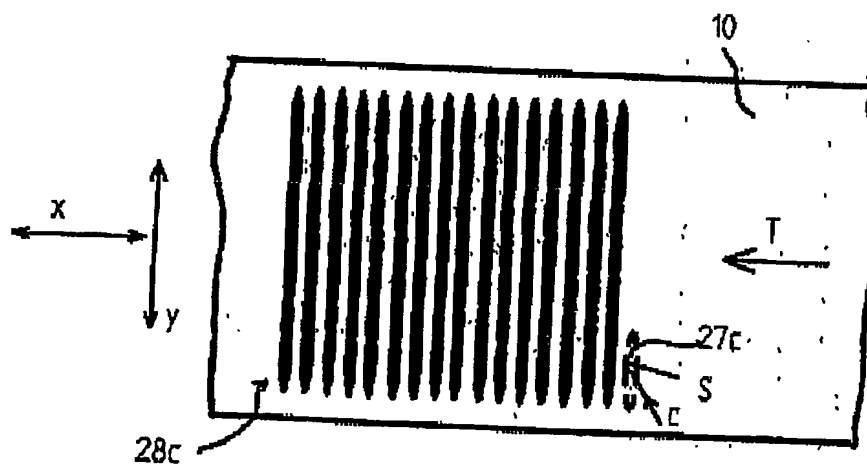


Fig 3c

4/4

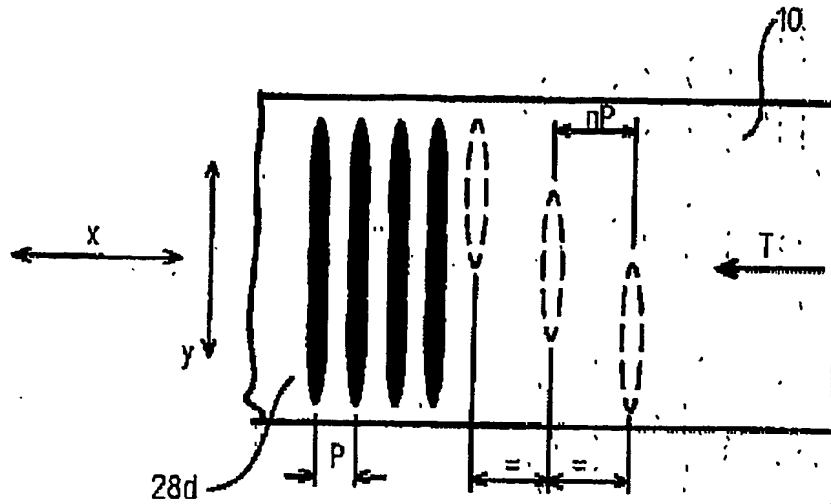


Fig 3d

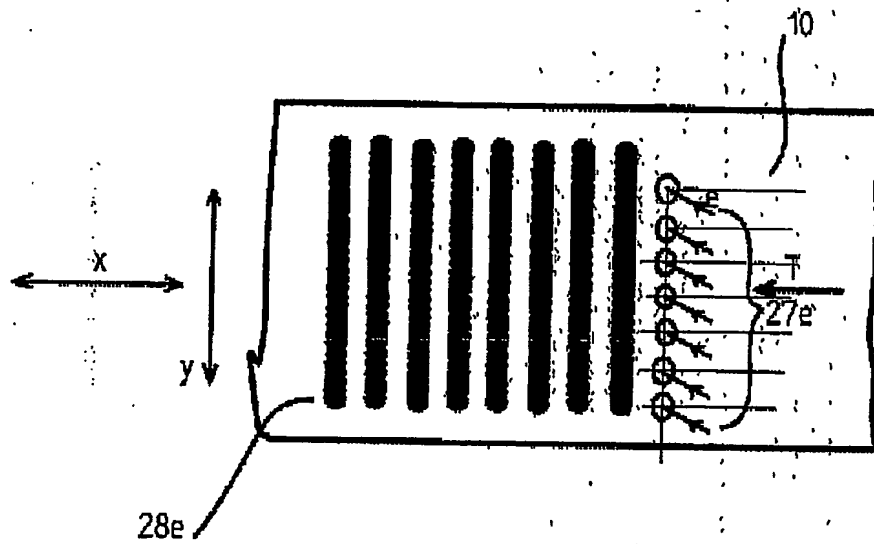


Fig 3e

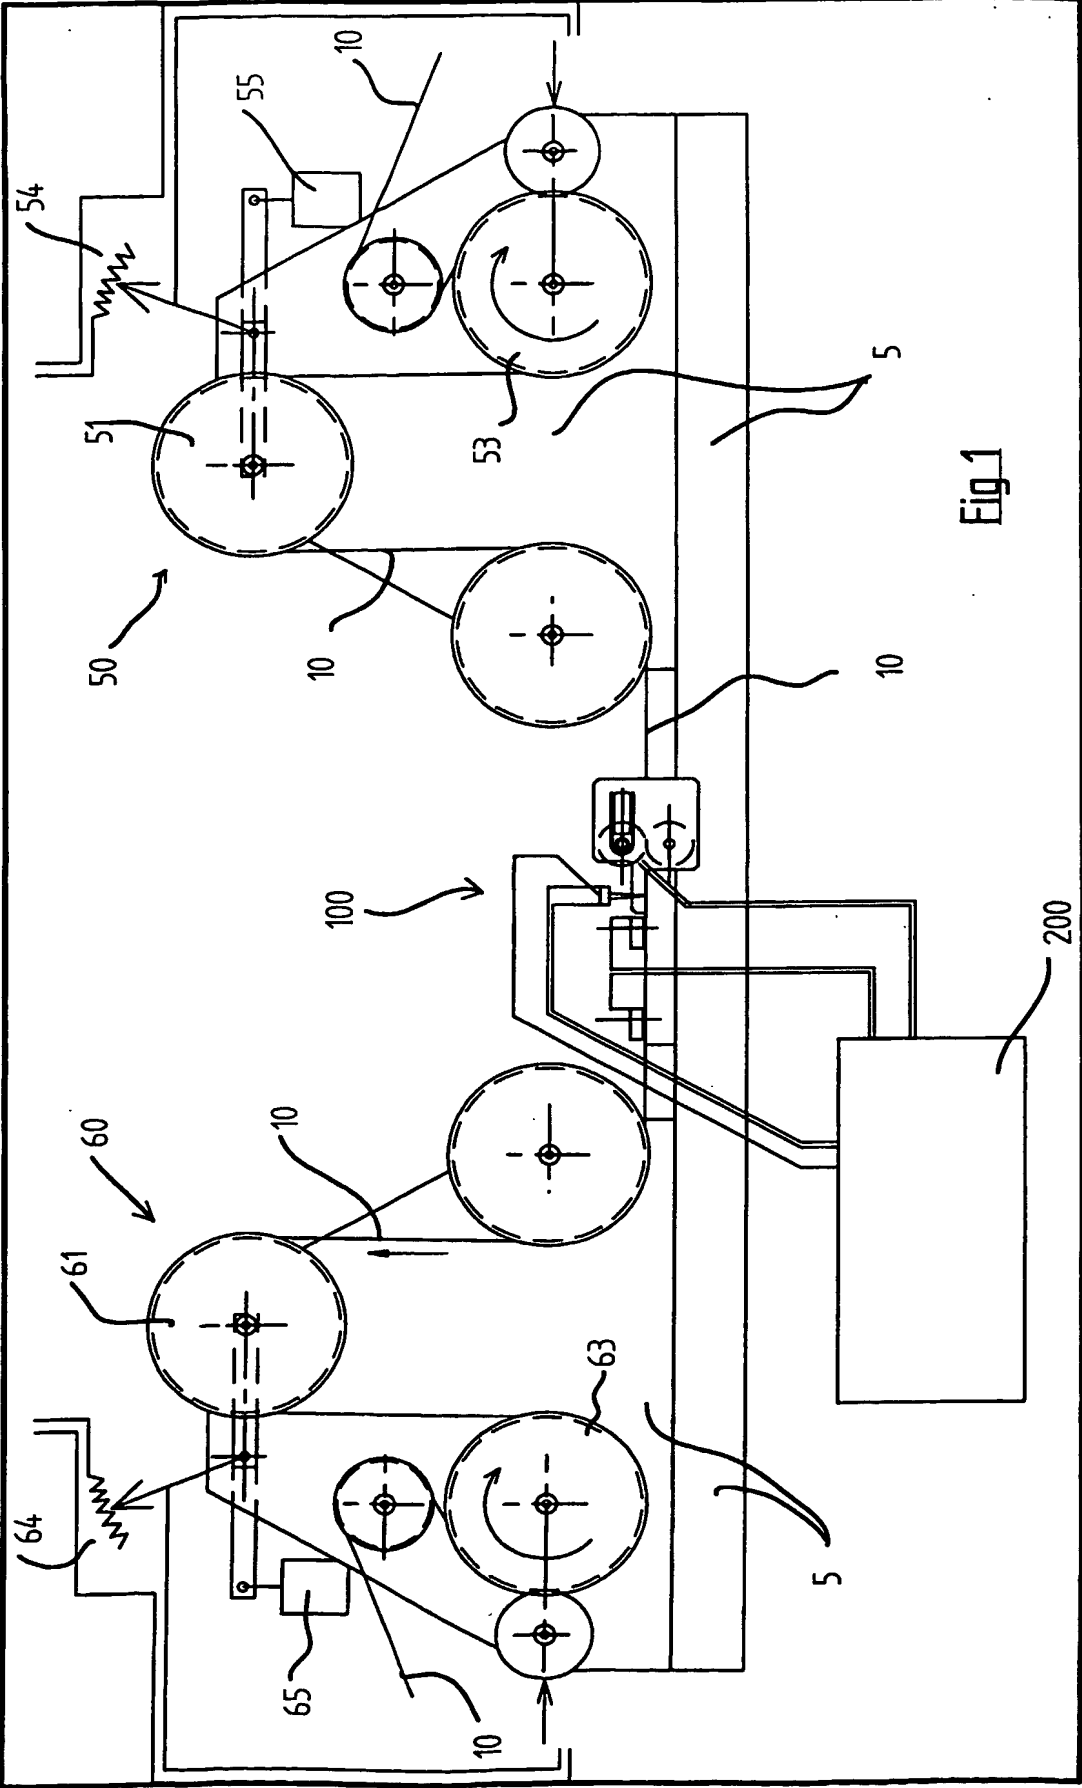


Fig 1

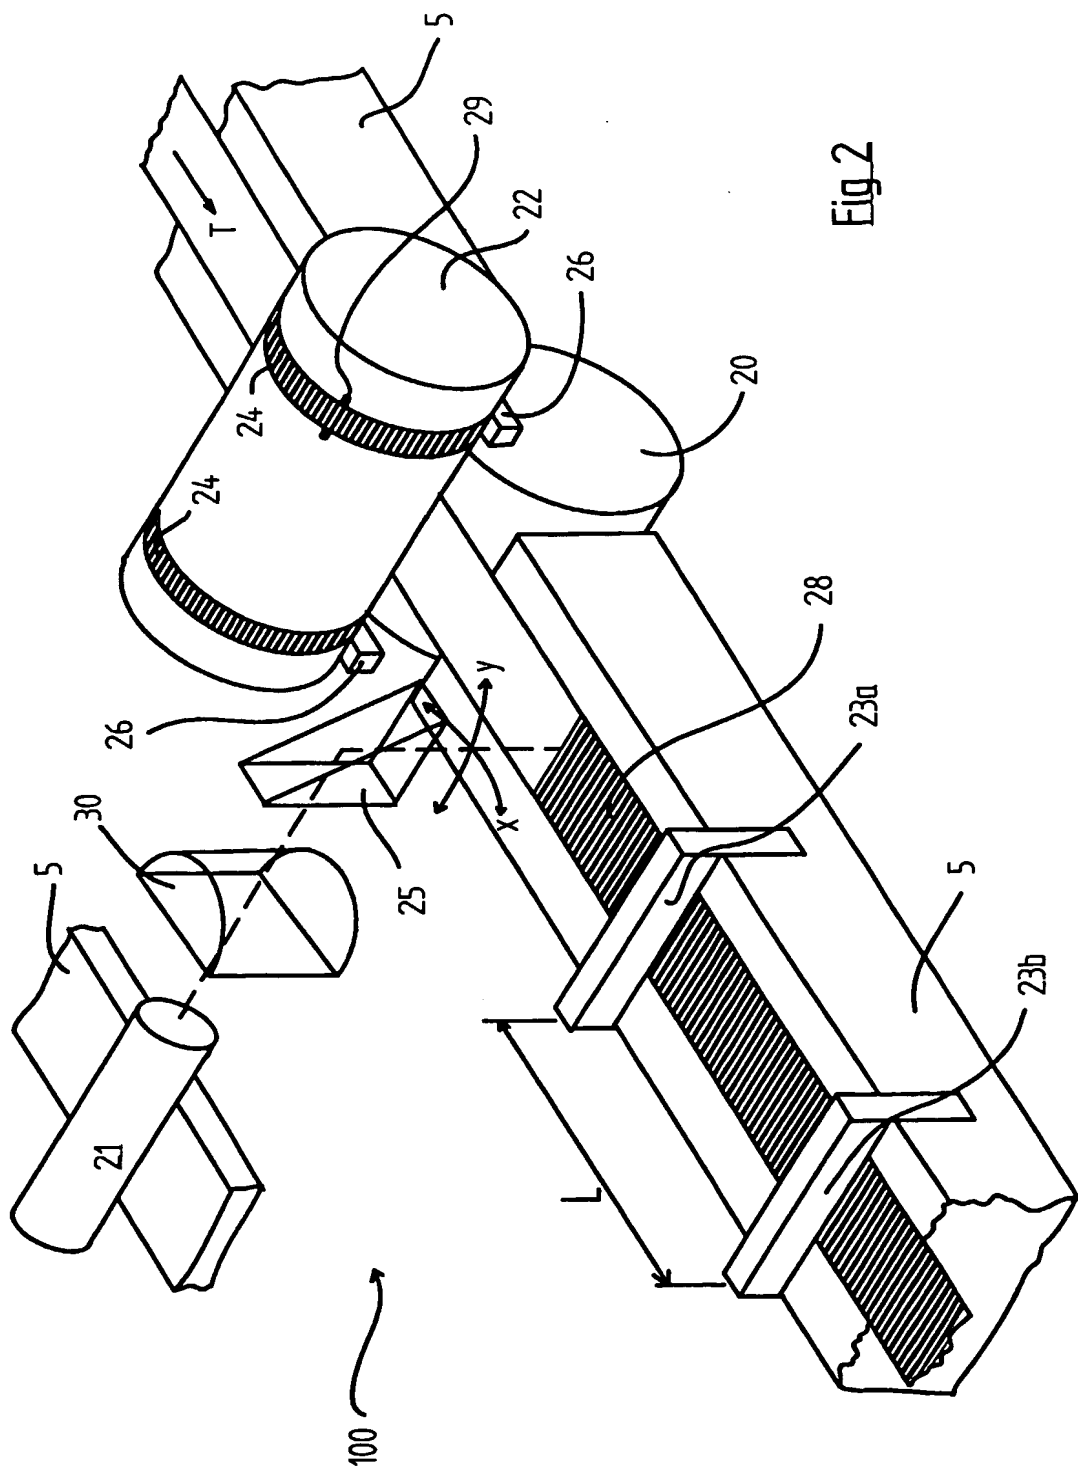


Fig. 2

3/4

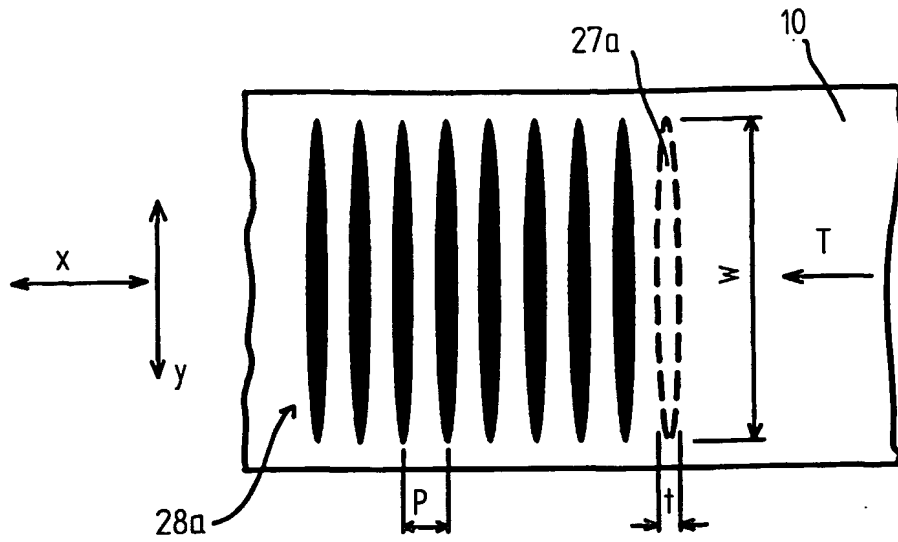


Fig 3a

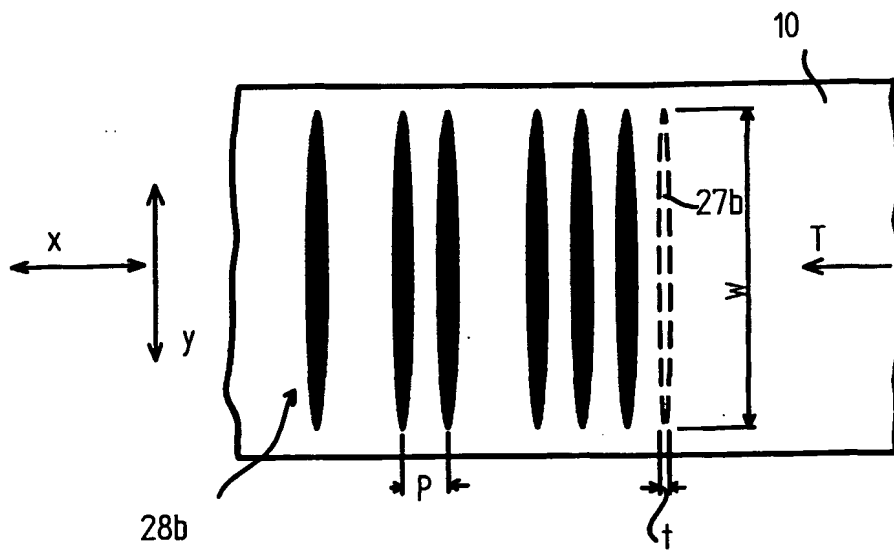


Fig 3b



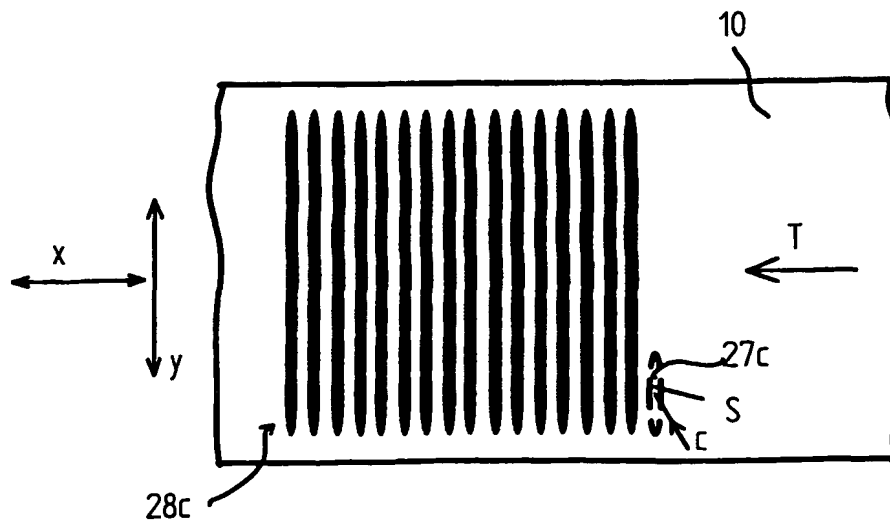


Fig 3c

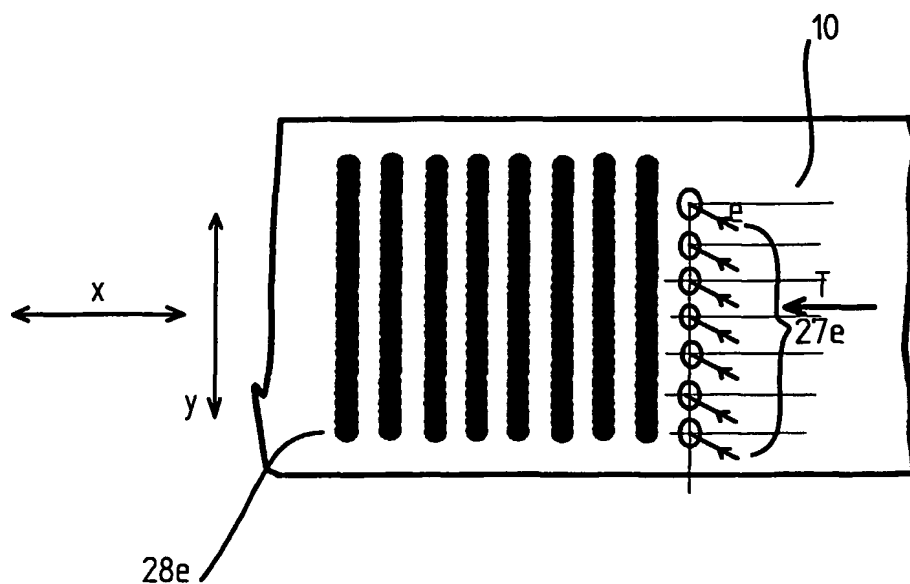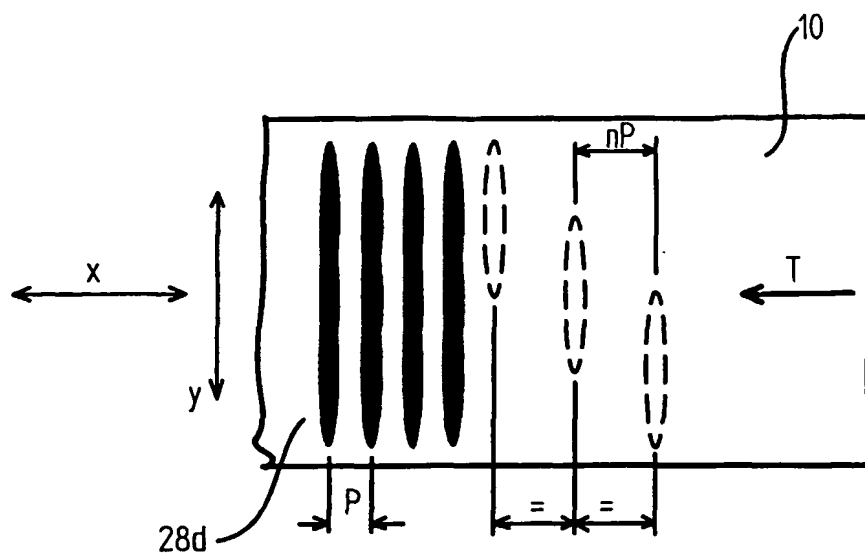

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.